




**Part Number :** [527460871](#)

**Product Description :** Easy-On FFC/FPC Connector, 0.50mm Pitch, Slider Series, Right-Angle, Bottom Contact, 2.00mm Height, 8 Circuits, Gold Plating

**Series Number :** 52746

**Status :** Active

**Product Category :** FFC / FPC Connectors

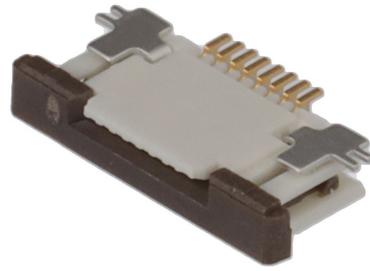

---

## Documents & Resources

### Drawings

[Drawing 527460871\\_sd.pdf](#)

### 3D Models and Design Files

[2D Drawing DXF 527460871.dxf](#)

[2D Drawing DXF PDF 527460871.pdf](#)

[3D Model 527460871\\_stp.zip](#)

[3D Model PDF 527460871.pdf](#)

### Specifications

[Packaging Specification SPK-52746-002-001.pdf](#)

[Product Specification PS-52746-015-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	FFC / FPC Connectors
Series	52746
Description	Easy-On FFC/FPC Connector, 0.50mm Pitch, Slider Series, Right-Angle, Bottom Contact, 2.00mm Height, 8 Circuits, Gold Plating
Product Family	Easy-On FFC FPC Connectors
Product Name	Easy-On
UPC	822348157341

#### Agency

CSA	LR19980
UL	E29179

#### Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	50V

#### Physical

Actuator Type	Slider
Circuits (Loaded)	8
Color - Resin	Natural
Contact Position	Bottom
Durability (mating cycles max)	20
Flammability	94V-0
Mated Height	2.00mm

Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	Nylon
Net Weight	124.364/mg
Number of Rows	1
Orientation	Right Angle
Packaging Type	Embossed Tape on Reel
PC Tail Length	2.00mm
PCB Locator	No
PCB Mounting	Surface Mount
PCB Retention	Yes
Pitch - Mating Interface	0.50mm
Pitch - Termination Interface	0.50mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40° to +85°C
Wire/Cable Type	FFC/FPC

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
0.50mm Pitch Premo-Flex FFC Jumpers	<u>15020</u>
0.50mm Pitch Premo-Flex FFC Jumpers	<u>15120</u>

---

This document was generated on Sep 01, 2023