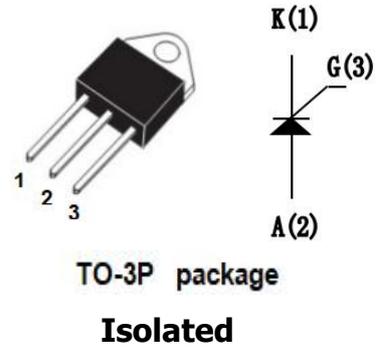


FEATURES

- I_{GT} Maximum= 50mA
- Max. Blocking Voltage = V_{DRM} , V_{RRM} = 1200 V
- High Static and Dynamic Commutation

APPLICATIONS

- Uninterruptible Power Supply (UPS)
- Bypass Switch
- Battery Charger
- Soft Starter for Motor Drive


ABSOLUTE MAXIMUM RATINGS(Ta=25°C)


SYMBOL	PARAMETER	MIN	UNIT
V_{DRM}	Repetitive Peak Off-state Voltage	1200	V
V_{RRM}	Repetitive Peak Off-state Voltage	1200	V
$I_{T(AV)}$	On-state Current $T_c=90^\circ\text{C}$	32	A
I_{TSM}	Non-repetitive Peak On-state Current, $t_p= 8.3\text{ms}$	493	A
	Non-repetitive Peak On-state Current, $t_p= 10\text{ms}$	450	A
I^2t	I^2t Value for Fusing, $t_p= 10\text{ms}$	1013	A ² S
$P_{G(AV)}$	Average Gate Power Dissipation, $T_j= 150^\circ\text{C}$	1	W
di/dt	Repetitive Rate of Rise of On-state Current after Triggering, $f= 50\text{Hz}$	200	A/us
I_{GM}	Peak Gate Current, $t_p=20\mu\text{s}$, $T_j= 150^\circ\text{C}$	8	A
T_j	Max. Operating Junction Temperature	150	°C
T_{stg}	Storage Temperature	-40~150	°C

isc Thyristors
TN5050H-12PI
THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	0.9	°C/W

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
I_{RRM}	Repetitive peak reverse current	$V_D=V_{DRM}$	--	5.0	μA
I_{DRM}	Repetitive peak off-state current	$V_D=V_{DRM}$	--	5.0	μA
dv/dt	Critical Rate of Rise of Off-state Voltage	$V_D= 800\text{V}, T_j= 125^\circ\text{C}$	2000	--	V/us
I_{GT}	Gate trigger current	$V_D= 12\text{V}, R_L= 33\ \Omega$	--	50	mA
I_H	Holding Current	$I_T= 0.5\text{A}$	--	100	mA
I_L	Latching Current	$I_G= 1.2 \times I_{GT}$	--	125	mA
V_{GT}	Gate trigger voltage all quadrant	$V_D= 12\text{V}, R_L= 33\ \Omega$	--	1.0	V
V_{TM}	On-state Voltage	$I_{TM}= 64\text{A}, t_p= 380\mu\text{s}$	--	1.55	V

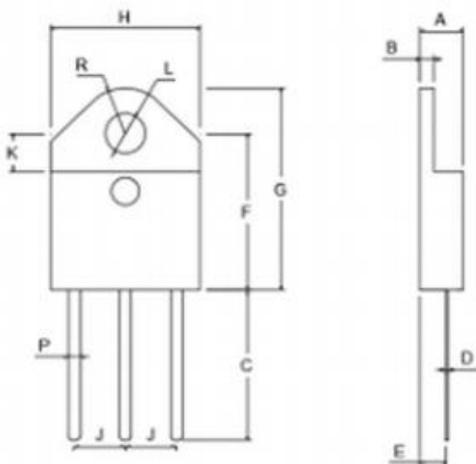PACKAGE OUTLINE
 Dimensions in mm


Dimension	Millimeter		Inches	
	Min	Max	Min	Max
A	4.40	4.60	0.173	0.181
B	1.45	1.60	0.057	0.063
C	15.20	15.60	0.598	0.614
D	0.55	0.70	0.022	0.028
E	2.70	2.90	0.106	0.114
F	15.80	16.50	0.622	0.650
G	21.05	21.75	0.829	0.856
H	15.10	15.50	0.594	0.610
J	5.15	5.55	0.203	0.219
K	3.85	4.25	0.152	0.167
L	4.00	4.20	0.157	0.165
P	1.20	1.37	0.047	0.054
R		4.60	0.000	0.181

PRODUCT DISCLAIMER

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

It is strictly prohibited to reprint or copy part or all of this datasheet without permission from ISC.

